

NATO STOCK NUMBERS AVAILABLE UPON REQUEST

**GENERAL SPECIFICATIONS**

Bore diameter:	20mm (0.8")
Total length:	43 cm (17")
Total weight:	3.1 kg (6.8 lbs.)
Height on stand:	38 cm (15") maximum
Composition:	Stainless Steel and Aluminium
Ignition voltage:	P-Series Blasting Machine; 24 volts; 1 amp
Laser system:	20mm Single or Dual Pointer Assembly
Liquid projectile:	100 mL (3.4 oz.)
Liquid load:	100 mL (3.4 oz.)
Peak liquid projectile velocity:	459 m/s (1,506 ft/s)
Kinetic energy:	7.2 kJ
Recoil impulse:	45.9 N.s
Vertical adjustment:	180°
Horizontal adjustment:	360°, for multi-purpose positioning
Barrel composition:	Stainless Steel
Barrel length:	38 cm (15")
Barrel weight:	2.4 kg (5.3 lbs.)

Product specifications and images are subject to change without notice.

DESCRIPTION

The 20mm Neutrex was the original disrupter that led Proparms to become a world leader in disrupter technology. It is a highly versatile, all-purpose disrupter, and can be used in a variety of situations, including underwater. The 20mm Neutrex may be used in either manual or robotic deployment. No tools are required for a 2 ½ minute setup and preparation. Maximum recommended standoff is 3 metres (10 ft.) dependent on target.

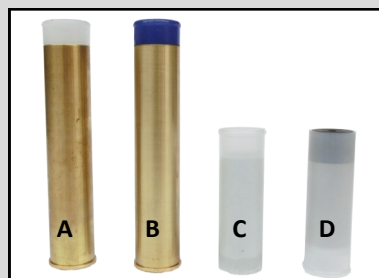
AMMUNITION

- A - Electrically primed - 40, 45, 50, 55, Magnum 70 grain
- B - Percussion primed - 30, 35, 40, 50 grain
- C - 20mm Avon Frangible
- D - 20mm Flathead Steel Slug
- E - Gel Shot

Ammunition is not included as part of the system.

Percussion Breech also available.

Warranty valid only with the use of Proparms ammunition.

**ACCESSORIES**

P2
Blasting Machine



Wire Wheel
100 m (330 ft)



RAM
Recoil Absorbing
Mechanism



20mm Single
Laser



20mm Dual
Laser



Bore
Laser Kit



Universal
Knapsack